

ARAMAR FF220FC

NON FLAMMABLE FABRIC



DESCRIPTION:

Comfortable protection against fire and heat


COLORS:

a) Standard Colors



Navy blue

b) Customized colors (300 mts.)

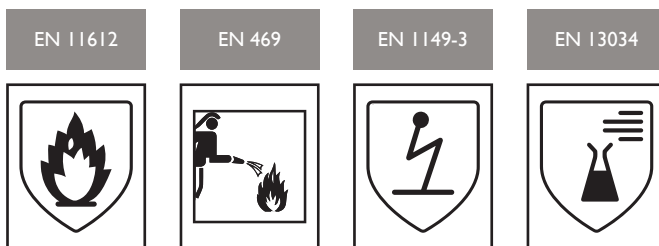

Article
**ARAMAR
FF220FC**

Composition	54% META 44 % PARA 2% AT
Weave	Special
Weight	225 g/m ² ± 5%
Usable width	157 cm

Technical Specs	Results	Standard
Heat Resistance (180°C)	PASS	ISO 17493
Limited Flame Spread (H)	A1	UNE-EN ISO 15025 (A)
Limited Flame Spread (V)	A2	UNE-EN ISO 15025 (B)
Convective Heat (s)	B1	UNE-EN ISO 9151
Radiant Heat (s)	C1	UNE-EN ISO 6942
Contact Heat	F1	UNE-EN ISO 12127-1
Firefighters	PASS with a system of layers.	UNE-EN 469
Limited Flame Spread (American Vertical)	PASS	ASTM D 6413
Antistatic	PASS	UNE-EN 1149-3
Antacid	PASS	UNE-EN 13034
Tensile Strength Warp (N)	1570 ±10%	UNE-EN ISO 13934-1
Tensile Strength Weft (N)	1715 ±10%	UNE-EN ISO 13934-1
Tear Resistance Warp (N)	190 (-5 N)	UNE-EN ISO 13937-2
Tear Resistance Weft (N)	255 (-5 N)	UNE-EN ISO 13937-2
Dimensional Change Warp (%)	<3%	UNE-EN ISO 5077
Dimensional Change Weft (%)	<3%	UNE-EN ISO 5077

Testing done at internal laboratory.



Rev.1

Article
**ARAMAR
FF220FC**

Composition	54% META 44 % PARA 2% AT
Weave	Special
Weight	225 g/m ² ± 5%
Usable width	157 cm

Color Fastness		Change	AC	CO	PA	PES	PC	WO
Washing	ISO 105 C06 at 60°							
Dry Cleaning	ISO 105 D01							
Acid Perspiration	BS EN ISO 105 E04							
Alkali Perspiration	BS EN ISO 105 E04							
Artificial Light	EN ISO 105 B02							
		Change		Staining				
Dry Rubbing	EN ISO 105 X12							
		Change		Staining				
		Dry	Damp	Dry	Damp	Dry	Damp	
Hot Pressing	EN ISO 105-X11							

Testing done at internal laboratory.

